


Two Drawer Combo Cassette Unit  
Standard above A+ Fridge Drawer (VAS2)




Hydrocarbon  
R600a Refrigerant

(also available in HFC R404a) (only available with R600a)

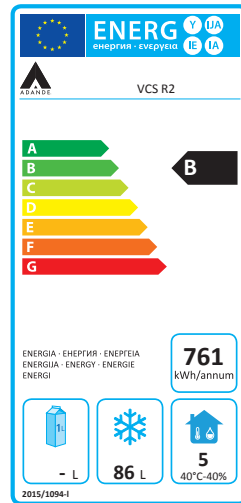

Standard Drawer  
'B' Energy Rating  
in Freezer Mode

'A' Energy Rating  
in Fridge Mode  
(Consumption 307  
kWh/annum)

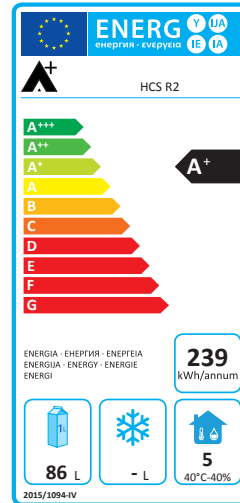

A+ Fridge  
Drawer

A+ Energy Rating  
(Consumption 239  
kWh/annum)

Two Drawer Combo Cassette Unit  
A+ Fridge above Standard Drawer (AVS2)



AVS2/FBT (pictured)  
Flat Base (FB)  
Cover Top (T)  
& AVS2/FBW

Blast Chill (BC)  
For added functionality  
a BC option is available  
with Standard Drawers

Storage Capacity

**Gastronorm (GN) Pans**  
4 x 1/1 GN  
100 mm Deep  
or equivalent (per Drawer)

**Maximum Weight**  
40 kg of Food (per Drawer)

**Volume**  
86 Litres (per Drawer)

Applications

- Ergonomic storage solution, right at the point of use
- Ideal for meat, deli & dessert prep
- Perfect for garnish and 'mise en place' generally
- Frozen storage by the deep fry station, with worktop mounted Fry Basket Rack as an optional extra

Temperature Flexibility

Foods can be stored at the optimum set point anywhere in the range

+15°C ← → -22°C

for Standard Drawers and

+15°C ← → 0°C

for A+ Fridge Drawers

Climate Testing

Tested to **Climate Class 4** (30°C & 55% relative humidity) for temperature and energy consumption and to **Climate Class 5** (40°C & 40% relative humidity) for temperature

Electrical


**Mains Supply**  
230 Vac 50 Hz

**Power Socket** (included)  
Correct 2 or 3 Pin Plug fitted for each country

**Mains Lead** (included)  
2 Metre Coiled Lead


Plan View |

Combo Cassette Unit  
VAS2 & AVS2  
with  
Open Drawer


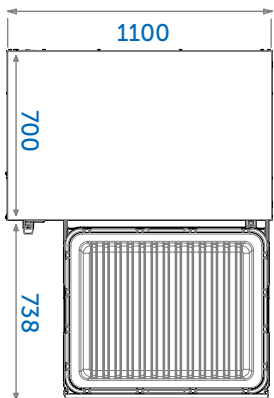


Elevations |


Combo Cassette Unit  
VAS2 (illustrated) & AVS2  
Flat Base (FB)  
Solid Worktop (W)



Combo Cassette Unit  
AVS2 (illustrated) & VAS2  
Flat Base (FB)  
Cover Top (T)

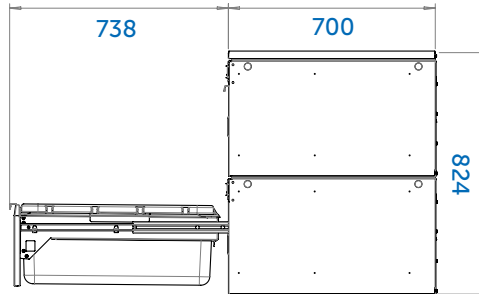

VAS2/FBW & AVS2/FBW

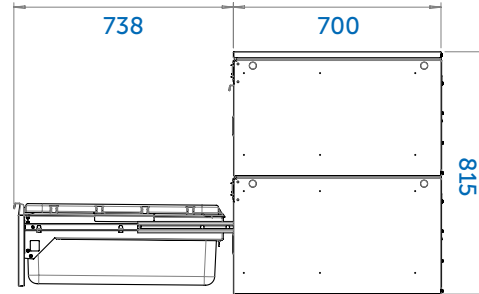

VAS2/FBT & AVS2/FBT


Tops |



Double Drawer Module |



Base |

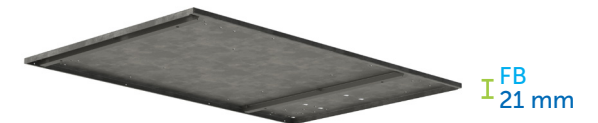

(Note: due to rounding differences, the dimensions for Drawer Module + Top + Base may vary by 1 mm compared to the dimensions shown below)

OPTIONS - STANDARD ABOVE A+ FRIDGE DRAWER - Code: VAS2 or A+ FRIDGE ABOVE STANDARD DRAWER - Code: AVS2

Combination of Standard Drawer (Temperature Range -22°C to +15°C) & Fridge Only Drawer (Temperature Range 0°C to +15°C)

2 DRAWER CASSETTE + SOLID WORKTOP (W)	Flat Base (FB)		2 DRAWER CASSETTE + COVER TOP (T)	Flat Base (FB)	
	Finished Height	VAS2/FBW & AVS2/FBW		Finished Height	VAS2/FBT & AVS2/FBT
	824 mm			815 mm	
Load Bearing	Check weight capacity of cook range or other fabricated housing of the Adande Cassette unit		Load Bearing	Check weight capacity of cook range or other fabricated housing of the Adande Cassette unit	