


Two Drawer Combo Cassette Unit Standard above Shallow Drawer (VSS2)



Blast Chill (BC)
For added functionality a BC option is available with Standard Drawers


VSS2/FBW (pictured)
Flat Base (FB)
Solid Worktop (W)
& **VSS2/FBT**

Hydrocarbon
R600a Refrigerant
(also available in HFC R404a)

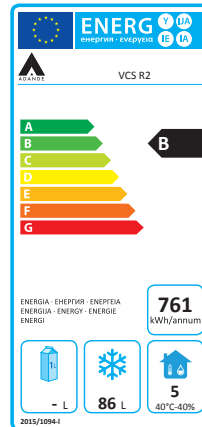

Standard Drawer
'B' Energy Rating
in Freezer Mode

'A' Energy Rating
in Fridge Mode
(Consumption 307
kWh/annum)

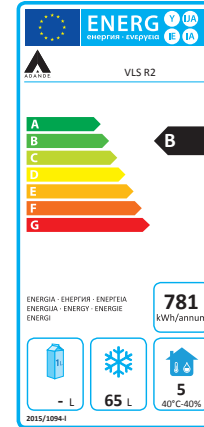

Shallow Drawer
'B' Energy Rating
in Freezer Mode

'A' Energy Rating
in Fridge Mode
(Consumption 325
kWh/annum)

Two Drawer Combo Cassette Unit Shallow above Standard Drawer (SVS2)



SVS2/FBT (pictured)
Flat Base (FB)
Cover Top (T)
& **SVS2/FBW**

Blast Chill (BC)
For added functionality a BC option is available with Standard Drawers

Storage Capacity	
Standard Drawer	Shallow Drawer
Gastronorm Pans 4 x 1/1 GN pans 100 mm Deep or equivalent	Gastronorm Pans 4 x 1/1 GN pans 75 mm Deep or equivalent
Maximum Weight 40 kg of Food	Maximum Weight 30 kg of Food
Volume 86 Litres	Volume 65 Litres

Applications

- Ergonomic storage solution, right at the point of use
- Ideal for meat, deli & dessert prep
- Perfect for garnish and 'mise en place' generally
- Frozen storage by the deep fry station, with worktop mounted Fry Basket Rack as an optional extra

Temperature Flexibility

Foods can be stored at the optimum set point anywhere in the range

+15°C ← → -22°C

Climate Testing

Tested to **Climate Class 4** (30°C & 55% relative humidity) for temperature and energy consumption and to **Climate Class 5** (40°C & 40% relative humidity) for temperature

Electrical


Mains Supply
230 Vac 50 Hz

Power Socket (included)
Correct 2 or 3 Pin Plug fitted for each country

Mains Lead (included)
2 Metre Coiled Lead



Plan View |

Combo Cassette Unit
VSS2 & SVS2
with
Open Drawer

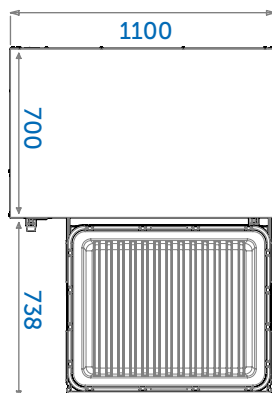



Elevations |

Combo Cassette Unit
VSS2 (illustrated) & SVS2
Flat Base (FB)
Solid Worktop (W)

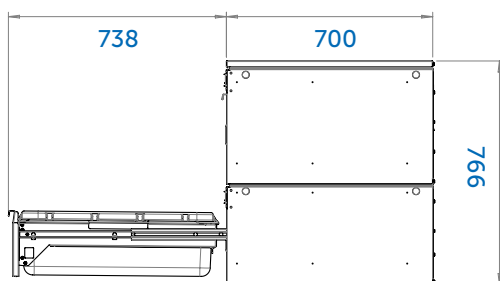

VSS2/FBW & SVS2/FBW

Combo Cassette Unit
SVS2 (illustrated) & VSS2
Flat Base (FB)
Cover Top (T)

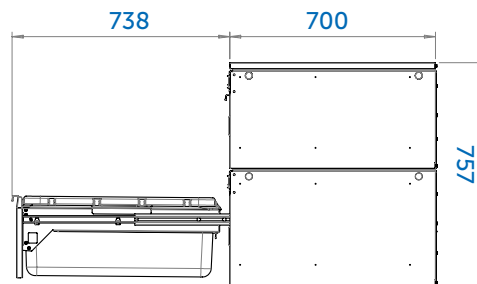

SVS2/FBT & VSS2/FBT


Tops |



Double Drawer Module |



Base |

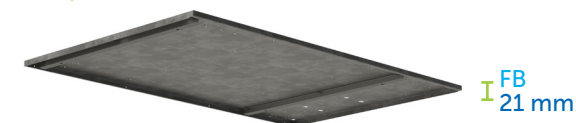

OPTIONS - STANDARD ABOVE SHALLOW DRAWER - Code: VSS2 or SHALLOW ABOVE STANDARD DRAWER - Code: SVS2

Combination of Standard & Shallow Drawers (Temperature Range -22°C to +15°C)

2 DRAWER CASSETTE + SOLID WORKTOP (W)	Flat Base (FB)		2 DRAWER CASSETTE + COVER TOP (T)	Flat Base (FB)	
	Finished Height	766 mm		VSS2/FBW & SVS2/FBW	Finished Height
Load Bearing	Check weight capacity of cook range or other fabricated housing of the Adande Cassette unit		Load Bearing	Check weight capacity of cook range or other fabricated housing of the Adande Cassette unit	