



Cassette Standard Depth Drawers Variable Fridge to Freezer Unit



Hydrocarbon R600a Refrigerant

Standard
Drawer

Fridge Only
Drawer

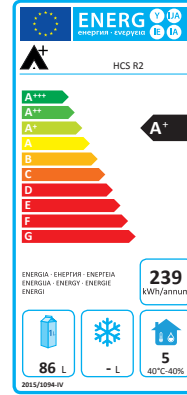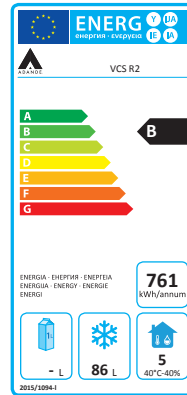

Standard Drawer
'B' Energy Rating
in Freezer Mode

A+ Fridge
Drawer

'A' Energy Rating
in Fridge Mode
(Consumption 307
kWh/annum)

A+ Energy Rating
(Consumption 239
kWh/annum)

(Also available
in HFC R404a)

(Hydrocarbon
R600a only)

Cassette Standard Depth Drawers A+ Fridge Only Unit



HCS2/FBT

Flat Base (FB)
Cover Top (T)

Blast Chill (BC)

For added functionality, a BC option is available with this spec of Drawer

VCS2/FBT

Flat Base (FB)
Cover Top (T)

Storage Capacity

Gastronorm (GN) Pans
4 x 1/1 GN
100 mm Deep
or equivalent (per Drawer)

Maximum Weight
40 kg of Food (per Drawer)

Volume
86 Litres (per Drawer)

Applications

- Brings refrigeration to the heart of the cookline
- Bulk storage right at the point of use
- Ideal for meat, deli and larder prep
- Suitable for pastry and dessert prep
- Perfect storage for garnish and 'mise en place' generally

Temperature Flexibility

Foods can be stored at the optimum set point anywhere in the range

+15°C ← → -22°C



for Standard & Shallow Drawers

+15°C ← → 0°C



for A+ Fridge Drawers

Climate Testing

Tested to **Climate Class 4** (30°C & 55% relative humidity) for temperature and energy consumption and to **Climate Class 5** (40°C & 40% relative humidity) for temperature

Electrical

Mains Supply
230 Vac 50 Hz

Power Socket (included)
Correct 2 or 3 Pin Plug fitted for each country


Mains Lead (included)
2 Metre Coiled Lead

Plan View |


Elevation |

Tops |

Cassette Drawers
VCS2 & HCS2
with
Open Drawer

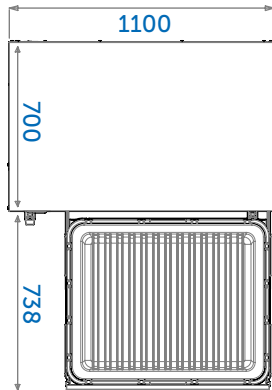


2 Drawer Cassette VCS2
Fridge to Freezer Unit
Flat Base (FB)
Solid Worktop (W)

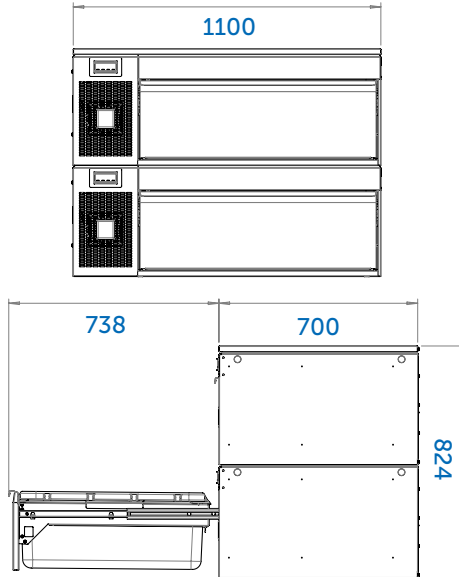

VCS2/FBW

2 Drawer Cassette HCS2
Fridge Only Unit
Flat Base (FB)
Cover Top (T)

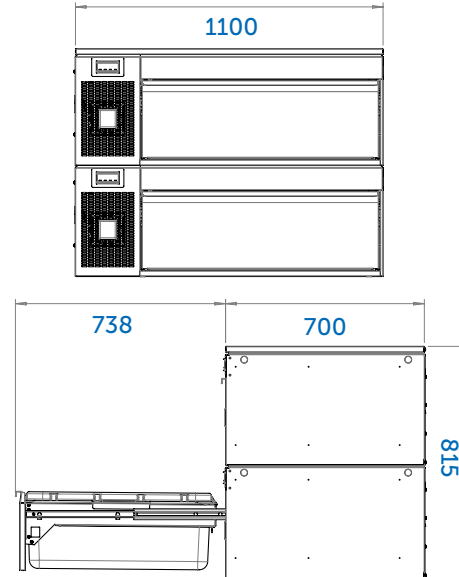


HCS2/FBT



Double
Drawer
Module



Base |

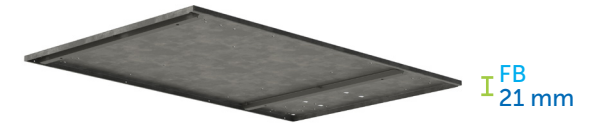

OPTIONS (Note: due to rounding differences, the dimensions for Drawer Module + Top + Base may vary by 1 mm compared to the dimensions shown below)

Cassette Drawer Specifications (Temperature Range -22°C to +15°C)

STANDARD DEPTH DRAWER + SOLID WORKTOP (W)	Flat Base (FB)	
Finished Height	824 mm	VCS2/FBW
Load Bearing	Check weight capacity of cook range or other fabricated housing of the Adande Cassette unit	

Cassette Drawer Specifications (Temperature Range 0°C to +15°C)

STANDARD DEPTH DRAWER + SOLID WORKTOP (W)	Flat Base (FB)	
Finished Height	824 mm	HCS2/FBW
Load Bearing	Check weight capacity of cook range or other fabricated housing of the Adande Cassette unit	

STANDARD DEPTH DRAWER + COVER TOP (T)	Flat Base (FB)	
Finished Height	815 mm	VCS2/FBT
Load Bearing	Check weight capacity of cook range or other fabricated housing of the Adande Cassette unit	

STANDARD DEPTH DRAWER + COVER TOP (T)	Flat Base (FB)	
Finished Height	815 mm	HCS2/FBT
Load Bearing	Check weight capacity of cook range or other fabricated housing of the Adande Cassette unit	